




BULLET CAMERA


2.0MP Starlight Network Camera

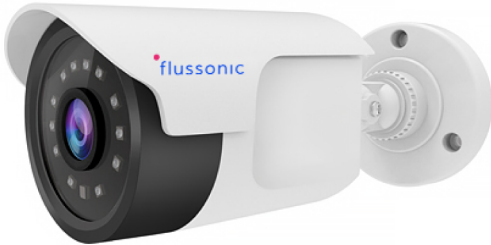

KEYFEATURES

- Resolution 1920x1080@25fps
- 18x IR-LED, Up to 25 Meters
- Low illumination camera
- ONVIF
- Embedded Flussonic Agent

DIMENSIONS(MM)

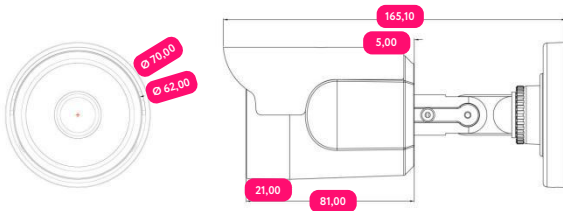

SPECIFICATIONS

Video

Image Sensor	1/ 2.9" CMOS
Max Resolution	1920 x 1080
Effective Pixels	2.0MP
Compression Standard	H.265/H.264
Maximum Frame Rate	1080p@25fps
BitRate	128Kbps~8Mbps
Illumination	0Lux (IR ON)

Lens

Lens	3.6mm
Viewing Angle	3.6 mm: 96°
IR-LEDs	14μ x12 LEDs
IR-Distance	Up to 25 Meters

Function

Motion Detection	Support
Email Alert	Support
Day & Night	Support
DHCP	Support
Privacy Mask	Support up to 4 areas
Exposure Control	Support
Image Adjustment	Support
Auto. White Balance	Support
Image Rotation	Support (Mirror/Flip)

Network

Ethernet	10M/100M Ethernet, RJ45 Port
Protocols	HTTP, TCP/IP, UDP, ICMP, RTSP, RTP, RTCP, SMTP, DHCP, DNS
Stream	2xStreams
LAN	Support
User	Up to 13 Users
Browser	IE8+, Chrome18+ ~42
SmartPhone	iOS/Android

General

Dimensions (W*H*D)	Φ70*165.1mm
Weights	230g
Material	Plastic
Working Temperature	-20° C~60° C
Humidity	RH 10%~90%
Power Supply	DC12V/1A, PoE
Consumption	Day ≤2W Night ≤ 6W
Waterproof	IP66

flussonic.com, support@flussonic.com
+1 (646) 851-24-43

©2020 Flussonic. All right reserved. Disclaimer: The information provided in this document represents the current design and specifications which are subject to change without notice. Under no circumstances, this document shall be reproduced, changed partially or wholly or distributed without the specific prior written authorization of Flussonic.